



KENDRION SOLUTIONS

EEX Line

Spring-applied single-disc brake for potentially explosion hazardous areas

EEX Line Standard

EEX Line (+50°C) / EEX Line (+60°C)

EEX Line / IEC Ex

EEX Line / U.S. (NEC 500/505) CSA

Kendrion – The brake experts

Kendrion stands for high-precision electromagnetic actuator systems and components for passenger cars, commercial vehicles and industrial applications. We are the trusted partner of some of the world's market leaders in the automotive and industrial segments when it comes to designing and producing complex components and customised solutions. Rooted in Germany, headquartered in the Netherlands and listed on the Amsterdam stock exchange, our expertise extends across Europe to the Americas and Asia.

Tradition and progress

More than one hundred years after the company was founded by Wilhelm Binder, Kendrion is ideally equipped for the challenges and tasks of the future. The company has always held a strong position in the market and is expanding its activities all over the world. In the field of electromagnetism, Kendrion stands for highest quality, innovation and precision.

Areas of application for brakes and clutches

The Kendrion business unit Industrial Drive Systems develops and produces electromagnetic brakes and clutches for industrial drive technology. They are used to accelerate, brake, position, hold and secure moving drive components and loads. Areas of applications for the brakes and clutches can be found mainly in robotics and automation, conveyor technology, tooling machines and production engineering, medical technology and elevator technology.

Worldwide availability

The main location is in Villingen-Schwenningen in southern Germany. However, Industrial Drive Systems has further development and production sites as well as a worldwide sales network at its disposal.

We will find the right brake for your application!



Safety with trusted brakes

About the EEX Line

The EEX Line is comprised of spring-applied single-disc brakes with explosion protection for use in potentially explosion hazardous locations. The flame proofed spring applied brake is suitable for use in underground mines where there is a danger of firedamp. Explosion proofed spring-applied brakes are characterised by the fact that all components which may ignite explosive mixtures are placed in an enclosure designed to withstand the specified test pressure and to prevent any mixtures outside the enclosure from being affected by the explosion. The

brakes are equipped with four thermostats and one microswitch. The microswitch prevents any unintentional motor start-up when the brake is not released. The thermostats, which are connected in series with the microswitch, interrupt the control circuit as soon as the brake exceeds the permitted maximum temperature limits. The brakes are corrosion protected. Electromagnetic spring-applied brakes generate the required brake torque when voltage is removed. The hand release feature fitted to the brake allows the braking effect to be neutralised manually.

Versions

76 26E..B00

torque range 10 to 270 Nm

DC

explosion proofing type II as per ATEX (EU)

76 26G..B00

torque range 10 to 270 Nm

AC (with rectifier)

explosion proofing type II as per ATEX (EU)

76 26N..B00

torque range 10 to 270 Nm

DC

flame proofing type I as per ATEX (EU)

76 26P..B00

torque range 10 to 270 Nm

AC (with rectifier)

flame proofing type I as per ATEX (EU)

Approvals

explosion proofing type II

II 2G Ex de IIC T5 Gb

II 2D Ex tb IIIC T100°C Db, IP67

DMT 02 ATEX E 122 X



flame proofing type I

I M2 Ex de I Mb

II 2D Ex tb IIIC T100°C Db, IP67

DMT 02 ATEX E 122 X

Upon request, spring-applied single-disc brakes can be designed for lower rated torques and supplied without microswitch and hand release feature.
Further approvals: IEC Ex, NEC 500 or up to 60°C ambient temperature on request

Applications

DC motors

Three-phase motors

Gear motors

Lifting and materials handling technology

Petrochemical industry

Process technology for explosion protected and flammable areas...

Data sheets – General information

The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.



Spring-applied single-disc brake

Dust and explosion proofing type II for DC or single-phase AC

Version	76 26E..B00 – DC 76 26G..B00 – single-phase AC
Standard rated voltage	76 26E..B00 – 205V DC 76 26G..B00 – 230V AC, 50Hz
Protection	IP 67
Thermal class	T 5 (acc. to EN 60079-0)
Ambient temperature	-20°C to +40°C
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change with-out notice. The “General technical information” and the “Operating instructions” 76 26E..B00 / 76 26G..B00 must be strictly observed.




Technical specifications

Size	Nominal torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power		Response times		Moment of inertia armature and flange hub	Weight
	M ₂ [Nm]	n _{max} [min ⁻¹]	P _{max} [kJ/h]	W _{max} [kJ]	P _N [W]	P _S [VA]	Coupling time (acc. to VDE 0580) t ₁ [ms]	Disconnection time t ₂ [ms]		
10	10	6000	270	41	56	62	80	80	2.5	14.5
11	20	6000	270	41	56	62	70	110	2.5	14.5
13	50	3600	400	55	82	88	110	170	21.5	29
16	100	3600	400	55	82	88	90	230	21.5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9							
10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

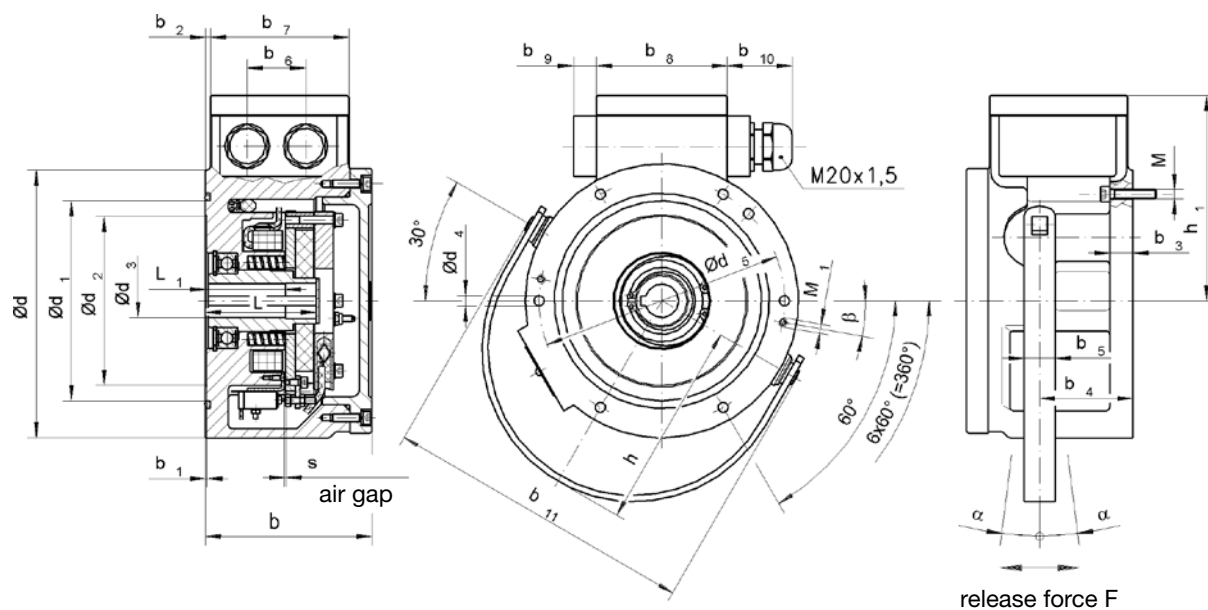

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉	b ₁₀	b ₁₁
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore with fitting key JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with fitting key JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾)

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

Spring-applied single-disc brake

Dust and firedamp protection type I for DC or single-phase AC

Version	76 26N..B00 – DC 76 26P..B00 – single-phase AC
Standard rated voltage	76 26N..B00 – 205V DC 76 26P..B00 – 230V AC, 50Hz
Protection	IP 67
Thermal class	T 5 (acc. to EN 60079-0)
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change without notice. The “General technical information” and the “Operating instructions” 76 ..N..B00 / 76 ..P..B00 must be strictly observed.



Technical specifications


Size	Nominal torque M_2 [Nm]	Max. speed n_{max} [min ⁻¹]	Max. switching power P_{max} [kJ/h]	Max. switching energy (Z = 1) W_{max} [kJ]	Rated power		Response times		Moment of inertia armature and flange hub J [kgcm ²]	Weight m [kg]
					P_N [W]	P_S [VA]	Coupling time (acc. to VDE 0580) t_1 [ms]	Disconnection time t_2 [ms]		
10	10	6000	270	41	56	62	80	80	2.5	14.5
11	20	6000	270	41	56	62	70	110	2.5	14.5
13	50	3600	400	55	82	88	110	170	21.5	29
16	100	3600	400	55	82	88	90	230	21.5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9

10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

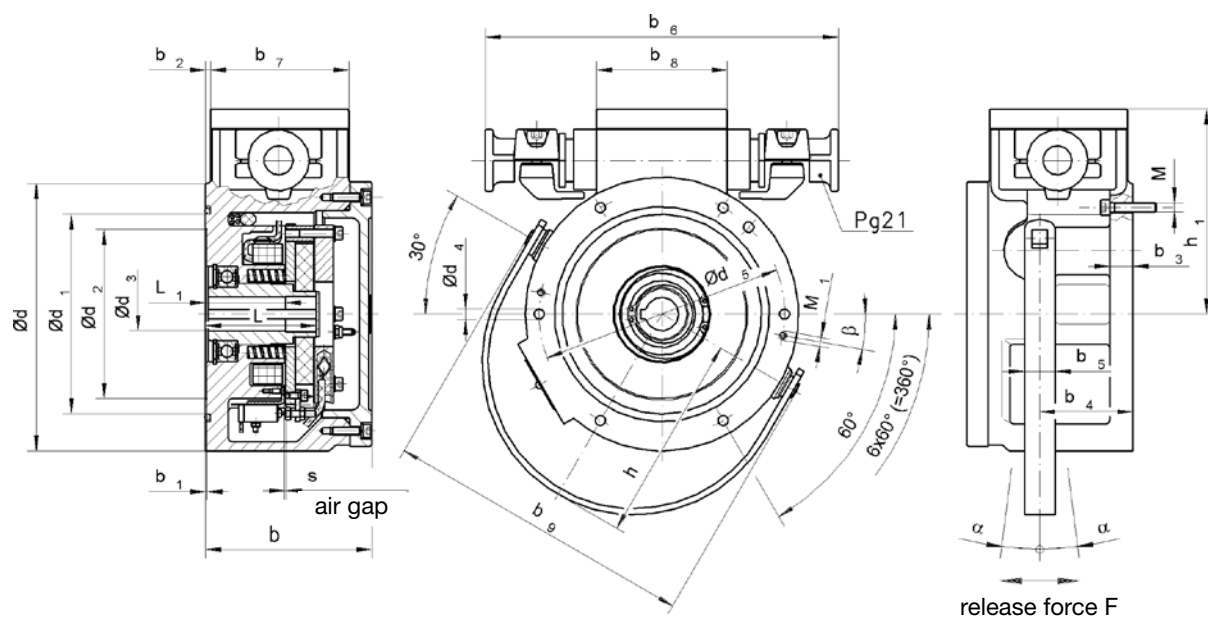

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. Min. bore with keyway JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with keyway JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾).

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

About the EEX Line (+50°C)

The EEX Line is comprised of spring-applied single-disc brakes with explosion protection for use in potentially explosion hazards locations. The flame proofed spring applied brake is suitable for use in underground mines where there is a danger of firedamp. Explosion proofed spring-applied brakes are characterised by the fact that all components which may ignite explosive mixtures are placed in an enclosure designed to withstand the specified test pressure and to prevent any mixtures outside the enclosure from being affected by the explosion. The brakes are equipped with four thermostats and one

microswitch. The microswitch prevents any unintentional motor start-up when the brake is not released. The thermostats, which are connected in series with the microswitch, interrupt the control circuit as soon as the brake exceeds the permitted maximum temperature limits. The brakes are corrosion protected. Electromagnetic spring-applied brakes generate the required brake torque when voltage is removed. The hand release feature fitted to the brake allows the braking effect to be neutralised manually. This version is designed for use at ambient temperatures of up to 50°C .

Versions ($T_{amb} = -20^{\circ}\text{C} \dots +50^{\circ}\text{C}$)

76 26E..B10

torque range 10 to 270 Nm

DC

explosion proofing type II as per ATEX (EU) + IEC Ex

76 26G..B10

torque range 10 to 270 Nm

AC (with rectifier)

explosion proofing type II as per ATEX (EU) + IEC Ex

76 26N..B10

torque range 10 to 270 Nm

DC

flame proofing type I as per ATEX (EU) + IEC Ex

76 26P..B10

torque range 10 to 270 Nm

AC (with rectifier)

flame proofing type I as per ATEX (EU) + IEC Ex

Approvals

explosion proofing type II

II 2G Ex de IIC T4 Gb

II 2D Ex tb IIIC T105°C Db, IP67

DMT 02 ATEX E 122 X; IEC Ex BVS 11.0025X



flame proofing type I

I M2 Ex de I Mb

II 2D Ex tb IIIC T105°C Db, IP67

DMT 02 ATEX E 122 X; IEC Ex BVS 11.0025X

Upon request, spring-applied single-disc brakes can be designed for lower rated torques and supplied without microswitch and hand release feature.

Further approvals: $T_{amb} \leq 60^{\circ}\text{C}$ or NEC500 on request

Applications

DC motors

Three-phase motors

Gear motors

Lifting and materials handling technology

Petrochemical industry

Process technology for explosion protected and flammable areas...

Data sheets – General information

The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.





Spring-applied single-disc brake

Dust and explosion proofing type II for DC or single-phase AC

Version	76 26E..B10 – DC 76 26G..B10 – single-phase AC
Standard rated voltage	76 26E..B10 – 205V DC 76 26G..B10 – 230V AC, 50Hz
Protection	IP 67
Thermal class	T 4 (acc. to EN 60079-0)
Ambient temperature range	-20°C to +50°C
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change with-out notice. The “General technical information” and the “Operating instructions” 76 26E..B10 / 76 26G..B10 must be strictly observed.




Technical specifications

Size	Nominal torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power		Response times		Moment of inertia armature and flange hub	Weight
	M ₂ [Nm]	n _{max} [min ⁻¹]	P _{max} [kJ/h]	W _{max} [kJ]	P _N [W]	P _S [VA]	Coupling time (acc. to VDE 0580) t ₁ [ms]	Disconnection time t ₂ [ms]		
10	10	6000	270	41	56	62	80	80	2.5	14.5
11	20	6000	270	41	56	62	70	110	2.5	14.5
13	50	3600	400	55	82	88	110	170	21.5	29
16	100	3600	400	55	82	88	90	230	21.5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9							
10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

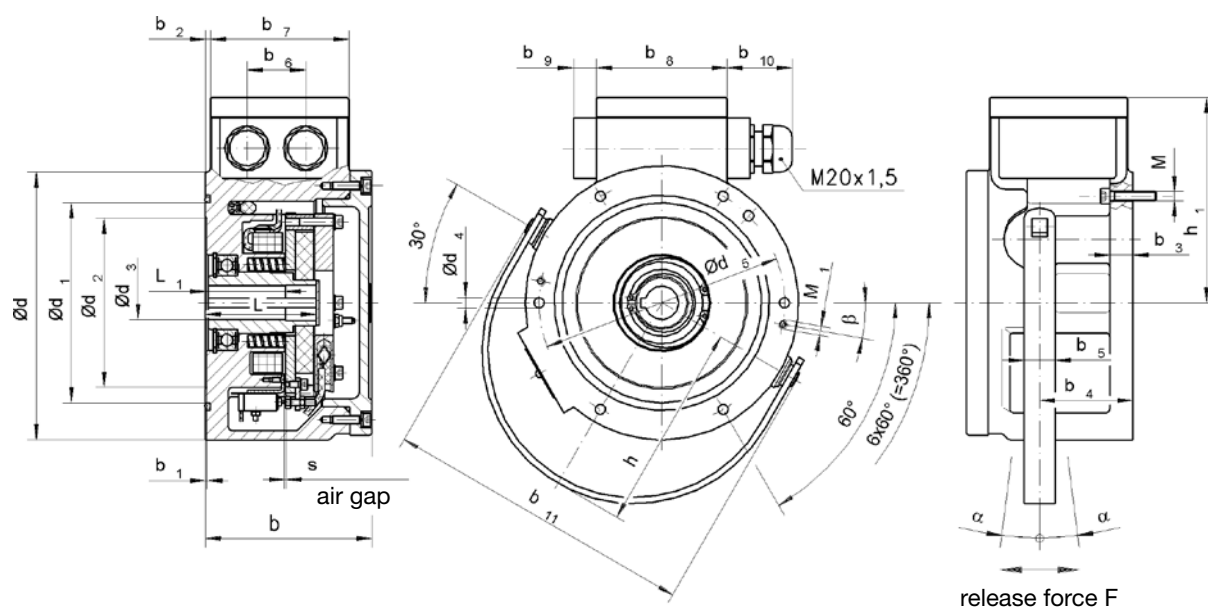

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉	b ₁₀	b ₁₁
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore with fitting key JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with fitting key JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾)

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

Spring-applied single-disc brake

Dust and firedamp protection type I for DC or single-phase AC

Version	76 26N..B10 – DC 76 26P..B10 – single-phase AC
Standard rated voltage	76 26N..B10 – 205V DC 76 26P..B10 – 230V AC, 50Hz
Protection	IP 67
Thermal class	T 4 (acc. to EN 60079-0)
Ambient temperature range	-20°C to +50°C
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change without notice. The “General technical information” and the “Operating instructions” 76 ..N..B10 / 76 ..P..B10 must be strictly observed.




Technical specifications

Size	Nominal torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power		Response times		Moment of inertia armature and flange hub	Weight
	M ₂ [Nm]	n _{max} [min ⁻¹]	P _{max} [kJ/h]	W _{max} [kJ]	P _N [W]	P _S [VA]	Coupling time (acc. to VDE 0580) t ₁ [ms]	Disconnection time t ₂ [ms]		
10	10	6000	270	41	56	62	80	80	2.5	14.5
11	20	6000	270	41	56	62	70	110	2.5	14.5
13	50	3600	400	55	82	88	110	170	21.5	29
16	100	3600	400	55	82	88	90	230	21.5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9							
10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

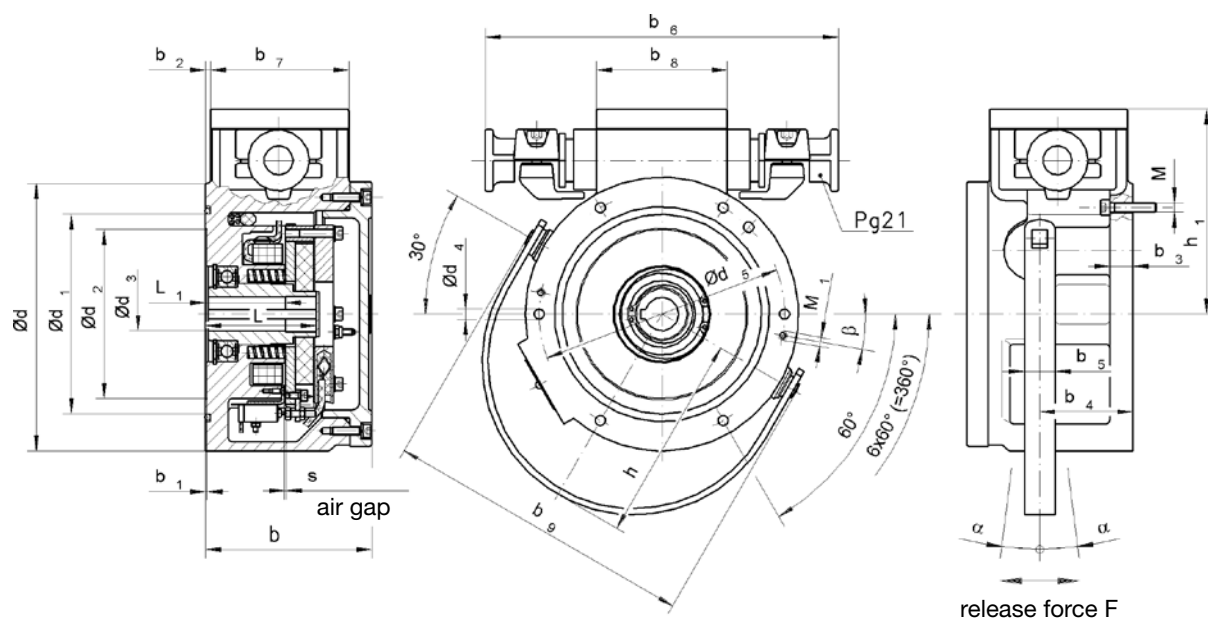

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. Min. bore with keyway JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with keyway JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾).

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

About the EEX Line (+60°C)

The EEX Line is comprised of spring-applied single-disc brakes with explosion protection for use in potentially explosion hazards locations. The flame proofed spring applied brake is suitable for use in underground mines where there is a danger of firedamp. Explosion proofed spring-applied brakes are characterised by the fact that all components which may ignite explosive mixtures are placed in an enclosure designed to withstand the specified test pressure and to prevent any mixtures outside the enclosure from being affected by the explosion. The brakes are equipped with four thermostats and one

microswitch. The microswitch prevents any unintentional motor start-up when the brake is not released. The thermostats, which are connected in series with the microswitch, interrupt the control circuit as soon as the brake exceeds the permitted maximum temperature limits. The brakes are corrosion protected. Electromagnetic spring-applied brakes generate the required brake torque when voltage is removed. The hand release feature fitted to the brake allows the braking effect to be neutralised manually. This version is designed for use at ambient temperatures of up to 60°C .

Versions ($T_{amb} = -20^{\circ}\text{C} \dots +60^{\circ}\text{C}$)

76 26E..B20

torque range 10 to 270 Nm

DC

explosion proofing type II as per ATEX (EU) + IEC Ex

76 26N..B20

torque range 10 to 270 Nm

DC

flame proofing type I as per ATEX (EU) + IEC Ex

Approvals

explosion proofing type II

II 2G Ex de IIC T4 Gb

II 2D Ex tb IIIC T115°C Db, IP67

DMT 02 ATEX E 122 X; IEC Ex BVS 11.0025X



flame proofing type I

I M2 Ex de I Mb

II 2D Ex tb IIIC T115°C Db, IP67

DMT 02 ATEX E 122 X; IEC Ex BVS 11.0025X

Upon request, spring-applied single-disc brakes can be designed for lower rated torques and supplied without microswitch and hand release feature.

Further approvals: $T_{amb} \leq 60^{\circ}\text{C}$ or NEC500 on request

Applications

DC motors

Three-phase motors

Gear motors

Lifting and materials handling technology

Petrochemical industry

Process technology for explosion protected and flammable areas...

Data sheets – General information

The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.



Spring-applied single-disc brake

Dust and explosion proofing type II for DC

Version	76 26E..B20 – DC
Standard rated voltage	76 26E..B20 – 205V DC
Protection	IP 67
Thermal class	T 4 (acc. to EN 60079-0)
Ambient temperature range	-20°C to +60°C
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change with-out notice. The “General technical information” and the “Operating instructions” 76 26E..B20




Technical specifications

Size	Nominal torque M_2 [Nm]	Max. speed n_{max} [min ⁻¹]	Max. switching power P_{max} [kJ/h]	Max. switching energy (Z = 1) W_{max} [kJ]	Rated power		Response times		Moment of inertia armature and flange hub J [kgcm ²]	Weight m [kg]
					P_N [W]	P_S [VA]	Coupling time (acc. to VDE 0580) t_1 [ms]	Disconnection time t_2 [ms]		
10	10	6000	220	41	56	62	80	80	2.5	14.5
11	20	6000	220	41	56	62	70	110	2.5	14.5
13	50	3600	330	55	82	88	110	170	21.5	29
16	100	3600	330	55	82	88	90	230	21.5	29
19	150	3600	480	80	91	95	180	240	125	57
24	270	3600	480	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9							
10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

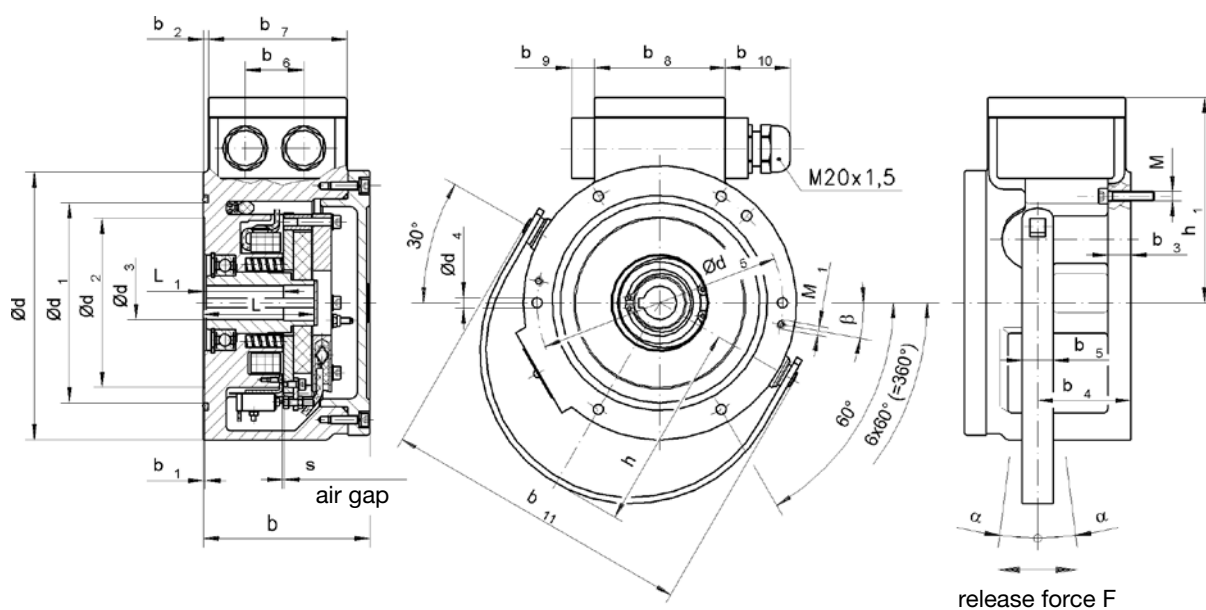

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉	b ₁₀	b ₁₁
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	38	90	85	15	ca. 43	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	38	90	85	15	ca. 43	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	38	90	85	15	ca. 43	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore with fitting key JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with fitting key JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾)

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

Spring-applied single-disc brake

Dust and firedamp protection type I for DC or single-phase AC

Version	76 26N..B20 – DC
Standard rated voltage	76 26N..B20 – 205V DC
Protection	IP 67
Thermal class	T 4 (acc. to EN 60079-0)
Ambient temperature range	-20°C to +60°C
Rated torque	10 to 270 Nm
Accessories (options)	mounting screws
Note	Specification subject to change with-out notice. The “General technical information” and the “Operating instructions” 76 ..N..B20



Technical specifications


Size	Nominal torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power		Response times		Moment of inertia armature and flange hub	Weight
					P_N	P_S	Coupling time (acc. to VDE 0580) t_1	Disconnection time t_2		
	M_2 [Nm]	n_{max} [min ⁻¹]	P_{max} [kJ/h]	W_{max} [kJ]	P_N [W]	P_S [VA]	t_1 [ms]	t_2 [ms]	J [kgcm ²]	m [kg]
10	10	6000	220	41	56	62	80	80	2.5	14.5
11	20	6000	220	41	56	62	70	110	2.5	14.5
13	50	3600	330	55	82	88	110	170	21.5	29
16	100	3600	330	55	82	88	90	230	21.5	29
19	150	3600	480	80	91	95	180	240	125	57
24	270	3600	480	80	91	95	140	350	125	57

Design types

Bore diameter (standard) [mm], flute DIN 6885 BL.1 JS9

10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

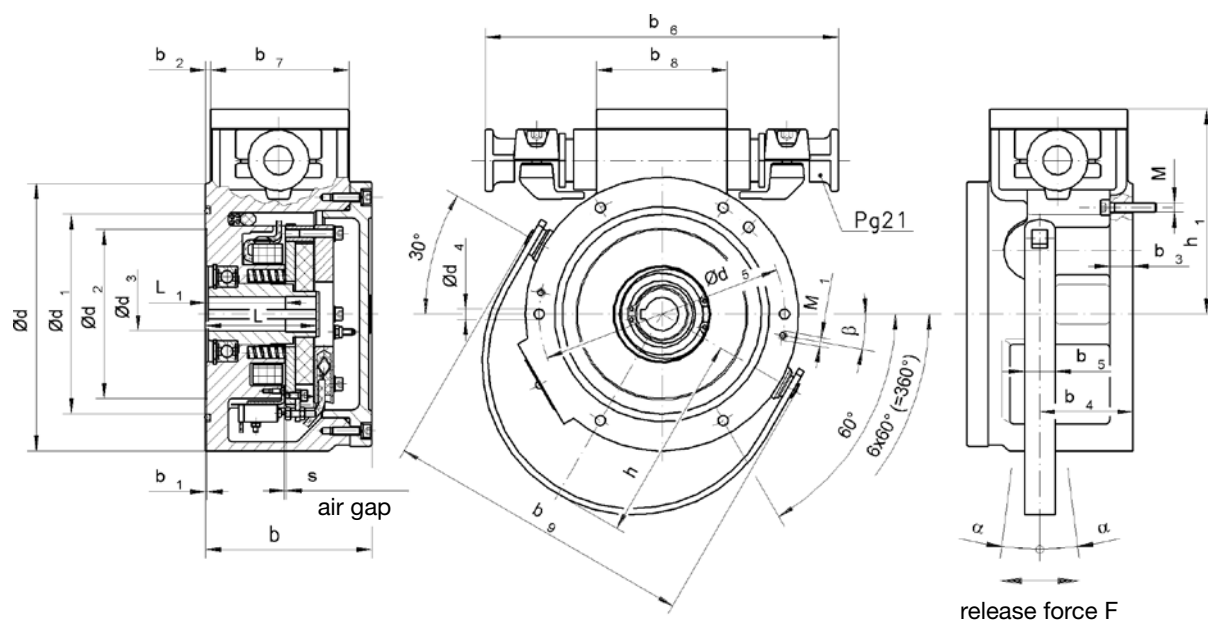

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6.6	160	108	1	2.5	15	60.7	20	230	90	85	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8.4	225	132	1	14	20	77.2	20	230	90	85	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10.5	305	143	1	16	20	79.8	25	230	90	85	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0.25 ^{+0.12}	0.7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0.25 ^{+0.15}	0.9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0.25 ^{+0.2}	1.1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. Min. bore with keyway JS9 as per DIN 6885, sheet 1

²⁾ Max. bore with keyway JS9 as per DIN 6885, sheet 1

³⁾ Undercut, no centering diameter

Supporting keyway over entire length. Shaft ISO fitting h6 (¹⁾, ²⁾).

Accessories

Size	Mounting screws			
	Screw	Nominal torque	Material number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9.7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

About the EEX Line / IEC Ex

The EEX Line brake series is comprised of spring-applied single-disc brakes with explosion protection for use in potentially explosive atmospheres. The firedamp-protected brakes included in the series are designed for use in mines that are susceptible to firedamp. All brake components that may ignite explosive mixtures are mounted in an enclosure designed to withstand the specified test pressure in case the mixture explodes inside the enclosure. As a result, mixtures outside the enclosure will not be affected by the explosion. The brakes are equipped with

four thermal switches and one microswitch. The microswitch prevents any unintentional motor start-up when the brake is not released. The thermal switches are connected in series with the microswitch. They interrupt the machine control circuit as soon as the brake exceeds the permitted maximum temperature limits. The brakes are saltwater-proof. Electromagnetic spring-applied brakes generate the required brake torque when voltage is removed. The hand release fitted to the brake can be used to neutralise the braking effect manually.

Versions

EX 26E..A00

Torque range 10 to 270 Nm

DC

Explosion protection type II to IEC Ex

EX 26G..A00

Torque range 10 to 270 Nm

AC (with rectifier)

Explosion protection type II to IEC Ex

EX 26N..A00

Torque range 10 to 270 Nm

DC

Firedamp protection type I to IEC Ex

EX 26P..A00

Torque range 10 to 270 Nm

AC (with rectifier)

Firedamp protection type I to IEC Ex

Approvals

Dust and explosion protection II

II 2G Ex de IIC T5

II 2D Ex tD A21 IP67 T100°C

IEC Ex BVS 11.0025X

DMT 02 ATEX E 122 X



Dust and firedamp protection I

I M2 Ex de I

II 2D Ex tD A21 IP67 T100°C

IEC Ex BVS 11.0025X

DMT 02 ATEX E 122 X

The brakes can be designed for lower rated torques and supplied without microswitch and hand release upon request.
Other approvals: NEC 500 / 505 upon request

Applications

DC motors

Threephase motors

Gear motors

Lifting and materials handling systems

Petrochemical industry

Process technology for explosion protected and flammable atmospheres...

Data sheets – General information

The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.



Spring-applied single-disc brake

Dust and explosion protection type II for DC and single-phase AC

Versions	EX 26E..A00 – DC EX 26G..A00 – single-phase AC
Standard rated voltage	EX 26E..A00 – 205 VDC EX 26G..A00 – 230 VAC, 50 Hz
Protection	IP 67
Temperature class	T5 (to IEC 60079-0)
Ambient temperature range	-20°C to +45°C
Rated torque	10 to 270 Nm
Accessories (options)	fixing screws
Note	Specifications subject to change without notice. The “General information on specification sheets” and the Operating Instructions EX ..E..A00 or EX ..G..A00 must be strictly observed.



Technical specifications


Size	Rated torque M_2 [Nm]	Max. speed n_{max} [min ⁻¹]	Max. switching power P_{max} [kJ/h]	Max. switching energy (Z = 1) W_{max} [kJ]	Rated power		Times		Moment of inertia hub and friction disc J [kgcm ²]	Weight m [kg]
					P_N [W]	P_S [VA]	Coupling time t_1 [ms]	Disconnection time t_2 [ms]		
10	10	6000	270	41	56	62	80	80	2,5	14,5
11	20	6000	270	41	56	62	70	110	2,5	14,5
13	50	3600	400	55	82	88	110	170	21,5	29
16	100	3600	400	55	82	88	90	230	21,5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Versions

Bore diameter (standard) [mm], JS9 keyway to DIN 6885, sheet 1

10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

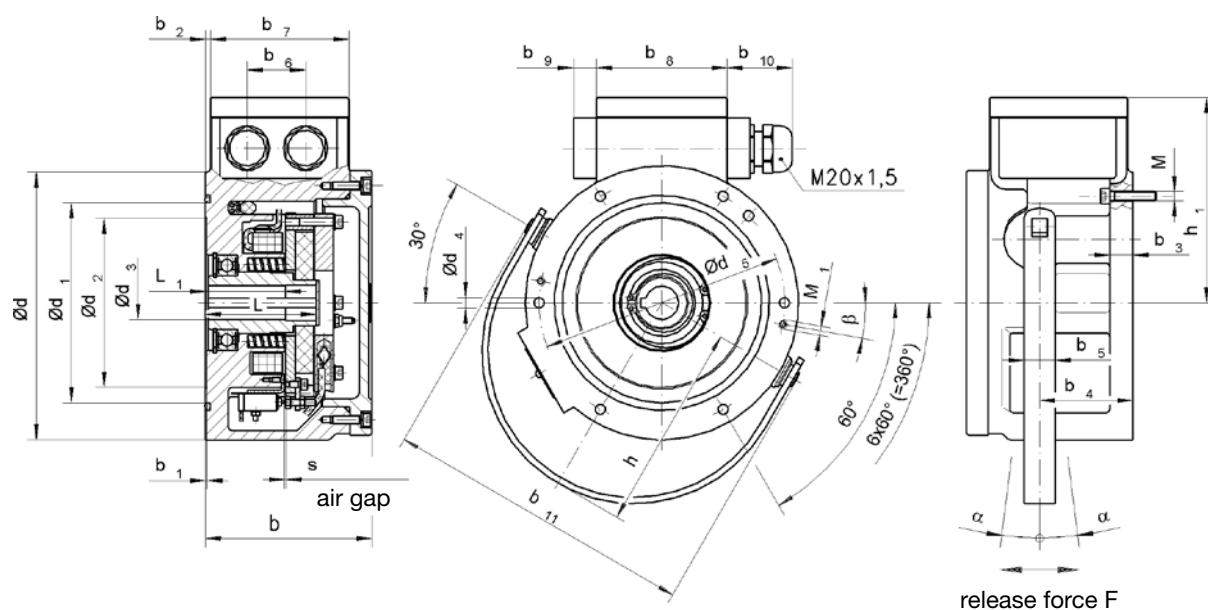

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉	b ₁₀	b ₁₁
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	38	90	85	15	ca. 43	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	38	90	85	15	ca. 43	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	38	90	85	15	ca. 43	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	38	90	85	15	ca. 43	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	38	90	85	15	ca. 43	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	38	90	85	15	ca. 43	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore, with JS9 keyway to DIN 6885, sheet 1

²⁾ Max. bore, with JS9 keyway to DIN 6885, sheet 1

³⁾ Undercut, no centring diameter

Supporting feather key over entire length, shaft with ISO "h6" fit (¹⁾, ²⁾).

Accessories

Size	Fixing screws			
	Screw	Tightening torque	Order number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

Spring-applied single-disc brake

Dust and firedamp protection I for DC and single-phase AC

Versions	EX 26N..A00 – DC EX 26P..A00 – single-phase AC
Standard rated voltage	EX 26N..A00 – 205 VDC EX 26P..A00 – 230 VAC, 50Hz
Protection	IP 67
Temperature class	T5 (to IEC 60079-0)
Ambient temperature range	-20°C to +45°C
Rated torque	10 to 270 Nm
Accessories (options)	fixing screws
Note	Specifications subject to change without notice. The “General information on specification sheets” and the Operating Instructions EX ..N..A00 or EX ..P..A00 must be strictly observed.



Technical specifications


Size	Rated torque M_2 [Nm]	Max. speed n_{max} [min ⁻¹]	Max. switching power P_{max} [kJ/h]	Max. switching energy (Z = 1) W_{max} [kJ]	Rated power		Times		Moment of inertia hub and friction disc J [kgcm ²]	Weight m [kg]
					P_N [W]	P_S [VA]	Coupling time t_1 [ms]	Disconnection time t_2 [ms]		
10	10	6000	270	41	56	62	80	80	2,5	14,5
11	20	6000	270	41	56	62	70	110	2,5	14,5
13	50	3600	400	55	82	88	110	170	21,5	29
16	100	3600	400	55	82	88	90	230	21,5	29
19	150	3600	570	80	91	95	180	240	125	57
24	270	3600	570	80	91	95	140	350	125	57

Versions

Bore diameter (standard) [mm], JS9 keyway to DIN 6885, sheet 1

10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

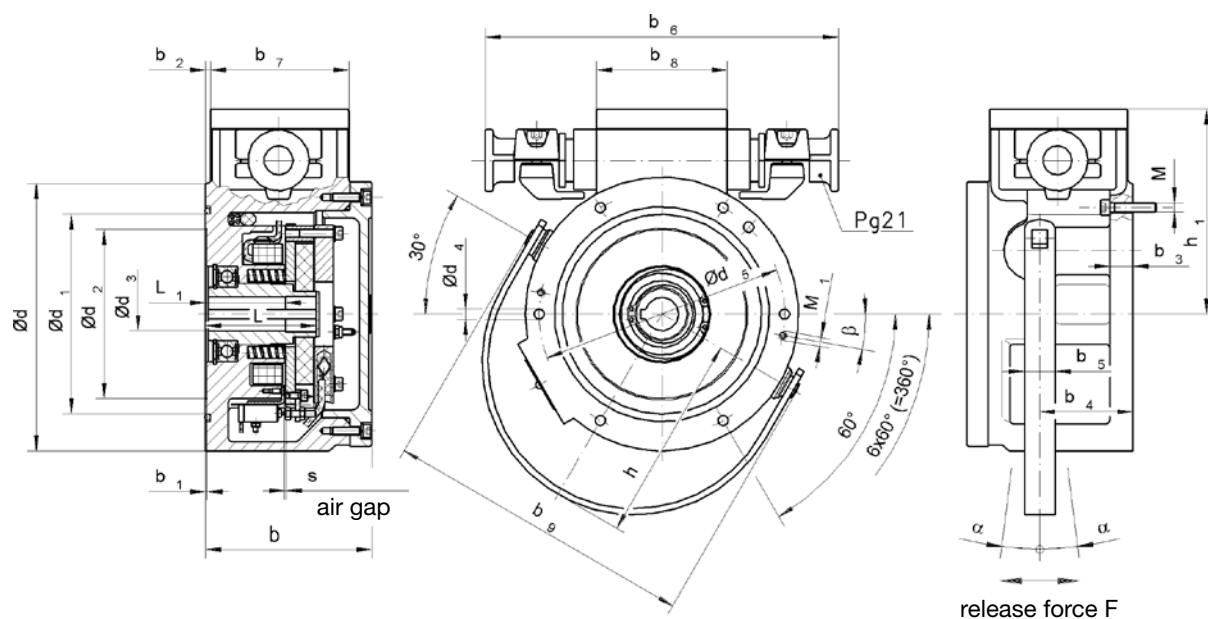

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	230	90	85	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	230	90	85	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	230	90	85	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	230	90	85	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	230	90	85	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	230	90	85	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore, with JS9 keyway to DIN 6885, sheet 1

²⁾ Max. bore, with JS9 keyway to DIN 6885, sheet 1

³⁾ Undercut, no centring diameter

Supporting feather key over entire length, shaft with ISO "h6" fit (¹⁾, ²⁾).

Accessories

Size	Fixing screws			
	Screw	Tightening torque	Order number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6

About the EEX Line / U.S. (NEC 500/505) CSA

The EEX Line brake series is comprised of spring-applied single-disc brakes with explosion protection for use in potentially explosive atmospheres. The firedamp-protected brakes included in the series are designed for use in mines that are susceptible to firedamp. All brake components that may ignite explosive mixtures are mounted in an enclosure designed to withstand the specified test pressure in case the mixture explodes inside the enclosure. As a result, mixtures outside the enclosure will not be affected by the explosion. The brakes are equipped with

four thermal switches and one microswitch. The microswitch prevents any unintentional motor start-up when the brake is not released. The thermal switches are connected in series with the microswitch. They interrupt the machine control circuit as soon as the brake exceeds the permitted maximum temperature limits. The brakes are saltwater-proof. Electromagnetic spring-applied brakes generate the required brake torque when voltage is removed. The hand release fitted to the brake can be used to neutralise the braking effect manually.

Versions
EX 26E..B00 Torque range 10 to 270 Nm DC Explosion protection type II to U.S. (NEC 500/505) CSA, US
EX 26G..B00 Torque range 10 to 270 Nm AC (with rectifier) Explosion protection type II to U.S. (NEC 500/505) CSA, US

Applications
DC motors
Threephase motors
Gear motors
Lifting and materials handling systems
Petrochemical industry
Process technology for explosion protected and flammable atmospheres...

Approvals
Dust and explosion protection II EX de IIC T5...T2, Class I, Zone 1, AEx de IIC T5...T2 Class I, Division 2, Groups C, D Class II, Division 1, Groups E, F and G Class III DIP A21 $T_A = 100^{\circ}C$ Enclosure Type 4 , IP66



The brakes can be designed for lower rated torques and supplied without microswitch and hand release upon request.
Other approvals: IEC Ex or ATEX upon request

Data sheets – General information
The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.



Spring-applied single-disc brake

Dust and explosion protection type II for DC and single-phase AC

Versions	EX 26E..B00 – DC EX 26G..B00 – single-phase AC
Standard rated voltage	EX 26E..B00 – 205 VDC EX 26G..B00 – 230 VAC, 50 Hz
Protection	IP 66
Temperature class	T 5 (acc. to EN60079-0, NEC 505)
Rated torque	10 to 270 Nm
Accessories (options)	fixing screws
Note	Specifications subject to change without notice. The “General information on specification sheets” and the Operating Instructions EX ..E..B00 or EX ..G..B00 must be strictly observed.




Technical specifications

Size	Rated torque M_2 [Nm]	Max. speed n_{max} [min ⁻¹]	Max. switching power P_{max} [kJ/h]	Max. switching energy (Z = 1) W_{max} [kJ]	Rated power		Times		Moment of inertia hub and friction disc J [kgcm ²]	Weight m [kg]
					P_N [W]	P_S [VA]	Coupling time t_1 [ms]	Disconnection time t_2 [ms]		
10	10	6000	270	41	56	62	80	80	2,5	14,5
11	20	6000	270	41	56	62	70	110	2,5	14,5
13	50	3000	400	55	82	88	110	170	21,5	29
16	100	3000	400	55	82	88	90	230	21,5	29
19	150	3000	570	80	91	95	180	240	125	57
24	270	3000	570	80	91	95	140	350	125	57

Versions

Bore diameter (standard) [mm], JS9 keyway to DIN 6885, sheet 1							
10	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
11	Ø 15	Ø 16	Ø 19	Ø 20	Ø 22		
13	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
16	Ø 22	Ø 25	Ø 28	Ø 32	Ø 35	Ø 38	Ø 40
19	Ø 40	Ø 42	Ø 50	Ø 60			
24	Ø 40	Ø 42	Ø 50	Ø 60			

Dimensions [mm]

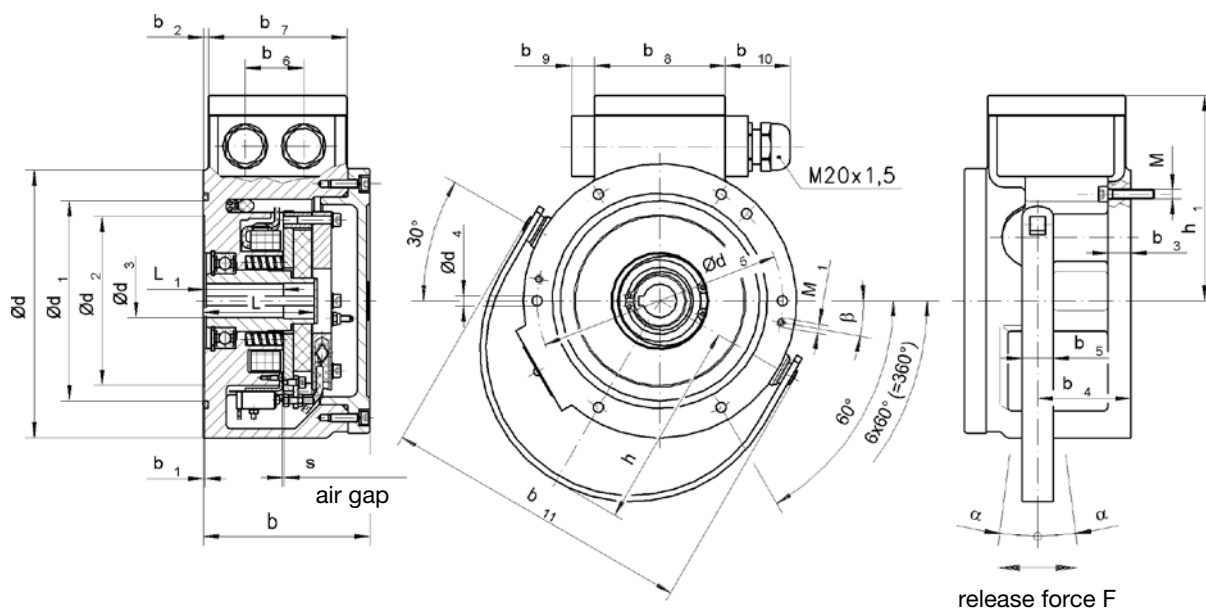

Size	d	d ₁	d ₂	d ₃ (G7)	d ₄	d ₅	b	b ₁	b ₂	b ₃	b ₄	b ₅	b ₆	b ₇	b ₈	b ₉	b ₁₀	b ₁₁
10	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	38	90	85	15	ca. 43	202
11	178	130	110 ³⁾	12 ¹⁾ / 22 ²⁾	6,6	160	108	1	2,5	15	60,7	20	38	90	85	15	ca. 43	202
13	245	180	160 ³⁾	20 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	38	90	85	15	ca. 43	262
16	245	180	160 ³⁾	24 ¹⁾ / 45 ²⁾	8,4	225	132	1	14	20	77,2	20	38	90	85	15	ca. 43	262
19	330	260	240 ³⁾	30 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	38	90	85	15	ca. 43	344
24	330	260	240 ³⁾	34 ¹⁾ / 70 ²⁾	10,5	305	143	1	16	20	79,8	25	38	90	85	15	ca. 43	344

Size	h	h ₁	L	L ₁	s	s _{max}	M	M ₁	F [N]	α	β
10	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 18	ca. 19°	10°
11	134	133	70	52	0,25 ^{+0,12}	0,7	6xM6	2xM6	ca. 35	ca. 19°	10°
13	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 45	ca. 19°	68°
16	164	161	90	83	0,25 ^{+0,15}	0,9	6xM8	3xM8	ca. 90	ca. 19°	68°
19	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 85	ca. 19°	70°
24	215	205	100	92	0,25 ^{+0,2}	1,1	6xM10	3xM10	ca. 170	ca. 19°	70°

¹⁾ Min. bore, with JS9 keyway to DIN 6885, sheet 1

²⁾ Max. bore, with JS9 keyway to DIN 6885, sheet 1

³⁾ Undercut, no centring diameter

Supporting feather key over entire length, shaft with ISO "h6" fit (¹⁾, ²⁾).

Accessories

Size	Fixing screws			
	Screw	Tightening torque	Order number	Screws per brake
10	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
11	ISO 4762 - M6 x 30 - 8.8	9,7 Nm	304 046	6
13	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
16	ISO 4762 - M8 x 35 - 8.8	24 Nm	304 071	6
19	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6
24	ISO 4762 - M10 x 40 - 8.8	45 Nm	304 107	6



Kendrion (Villingen) GmbH

Wilhelm-Binder-Strasse 4-6
78048 Villingen-Schwenningen
Germany

T +49 7721 877-0
F +49 7721 877-1462

sales-ids@kendrion.com
www.kendrion-ids.com

